





PIRANHA

PORTABLE PRESSES


FOR STRUCTURAL FABRICATING

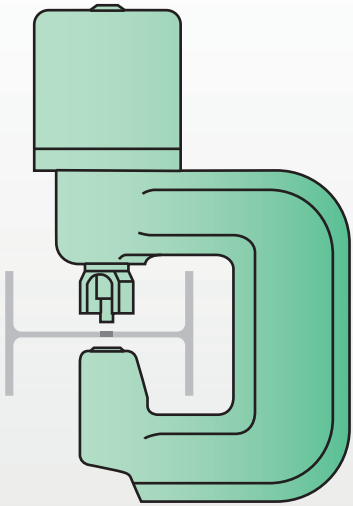


WEB PRESSES

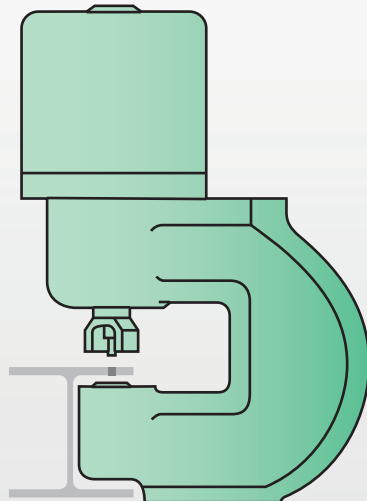

FLANGE PRESSES

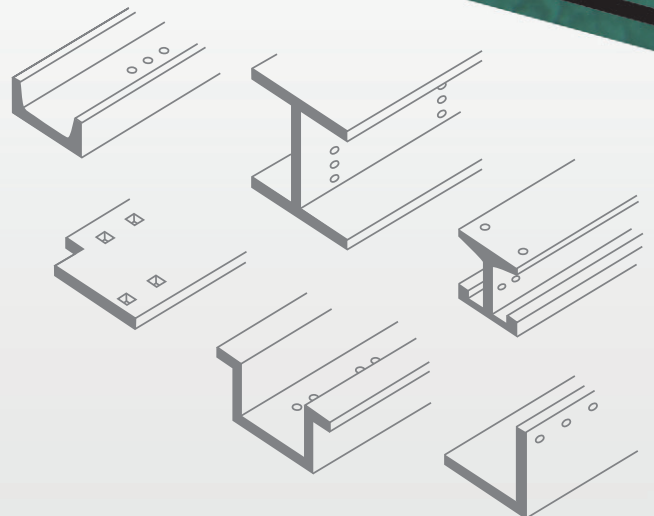

PIRANHA — LEADER IN PORTABLE HOLE PUNCHING




PORTABLE PRESSES ARE VERSATILE...

Punching is one of the least expensive ways of making holes in structural shapes. Piranha portable presses reduce “hole” costs because punching takes only a small fraction of the time required for drilling or burning holes and eliminates clean-up operations. You can make money punching wide flange beams, columns, channel iron, angle iron, I-beams, plate and other materials. The twenty-two press models shown in this catalog have the versatility to meet most on-the-job requirements.

TAKE THE PRESS TO THE WORK

On the Job Site

- Structural Fabrication Plants
- Ship Building
- Rail Car Builders
- Bridge Fabricators
- Tower Fabricators
- Sign Shops
- Miscellaneous Steel Fabrication

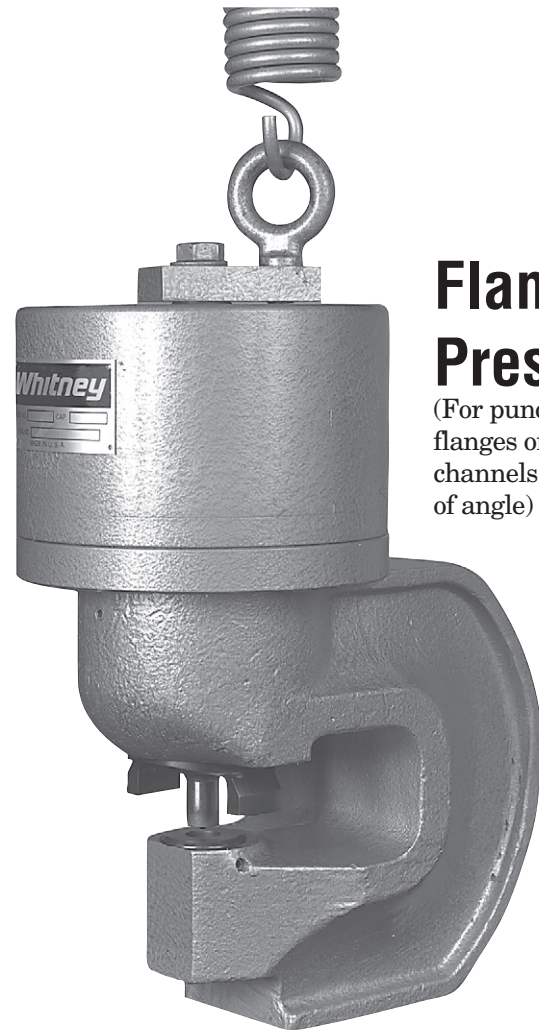


Flange Presses


(For punching flanges of beams, channels and legs of angle)

MODELS FOR EVERY SHAPE

- Wide Flanges
- Channels
- 'I' Beams
- 'T's
- Angles
- Flats
- Specials

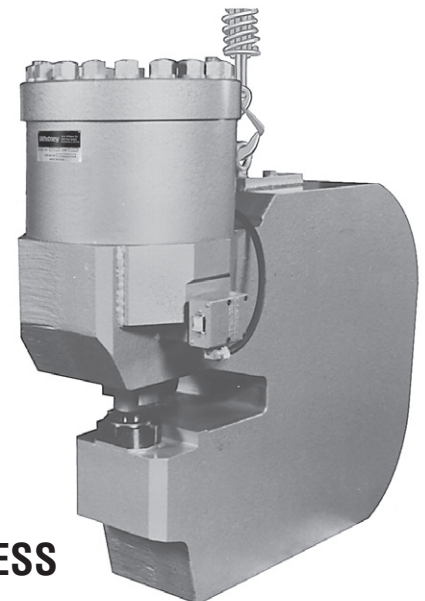


**250 TON
FLANGE PRESS**



PIRANHA — LEADER IN PORTABLE HOLE PUNCHING

PUNCH HOLES FAST AND CLEAN MANY SHAPES

(See page 19)

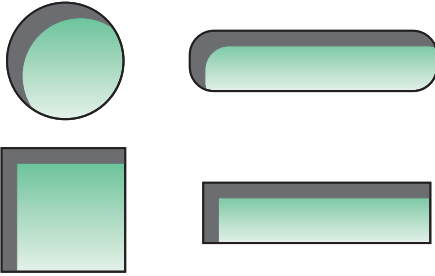

(Drills Make Chips & Only Round Holes)

EASILY MOUNT ON STAND





Standard presses have cast flanges for clamping to table...
also used to hold large presses when not suspended.
(Customer can easily make clamps.)

PUNCH

- A-36 Structural Steel
- A-572 Steel
- Cor-Ten
- Stainless Steel
- Aluminum
- Brass, Copper & Many Others


Web Presses

(For punching
webs of beams
and channels)




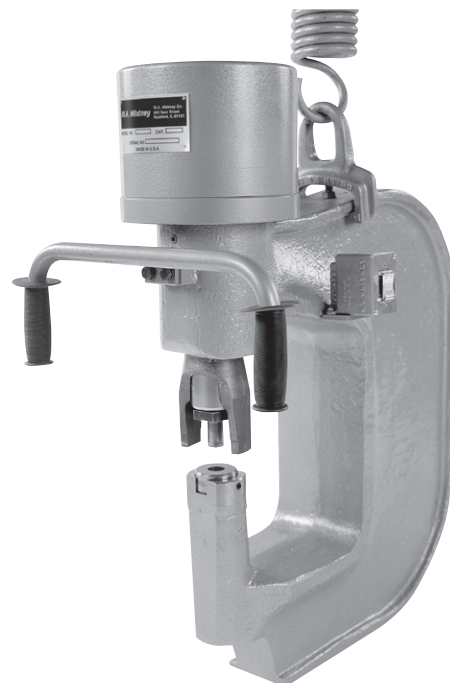
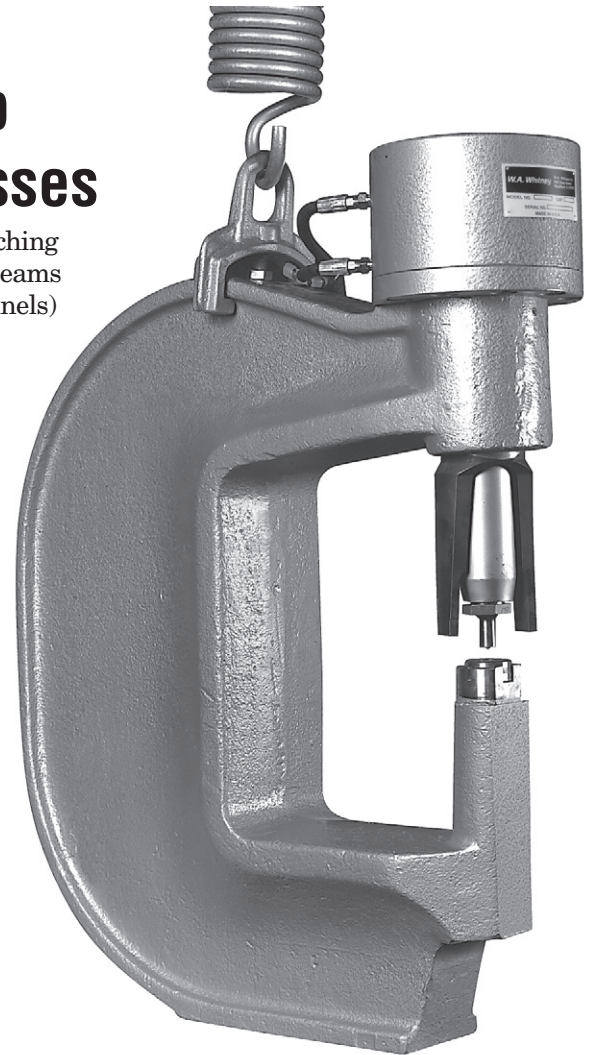



(Hand grips
optional on
standard presses)

ALL PIRANHA PRESSES FEATURE...






- Brute force; Proven high pressure hydraulics; 5000 P.S.I; Precise control; Smooth-Shock free
- Double-acting hydraulics; No spring stripping
- Rugged cast steel frame construction; Take abuse; Long life
- Quick easy tool change; Change hole size in minutes
- Take presses to the work; Reduce material handling; Don't drag the work to the press
- Complete punch cycle control; Jog punch to layout mark
- Clean punched holes; Any shape; No burrs; Scrap removed as slug without messy chips
- Lowest cost method; Just a few seconds per hole
- Easily maintained; Backed by Piranha parts and services
- "A" Series presses offer advanced features to improve production and prolong press life





DETERMINING PRESS STYLE


TWO BASIC TYPES OF PIRANHA PORTABLE PRESSES

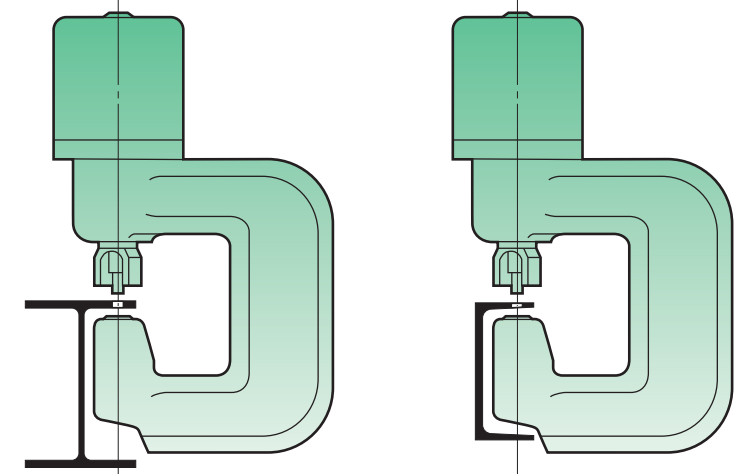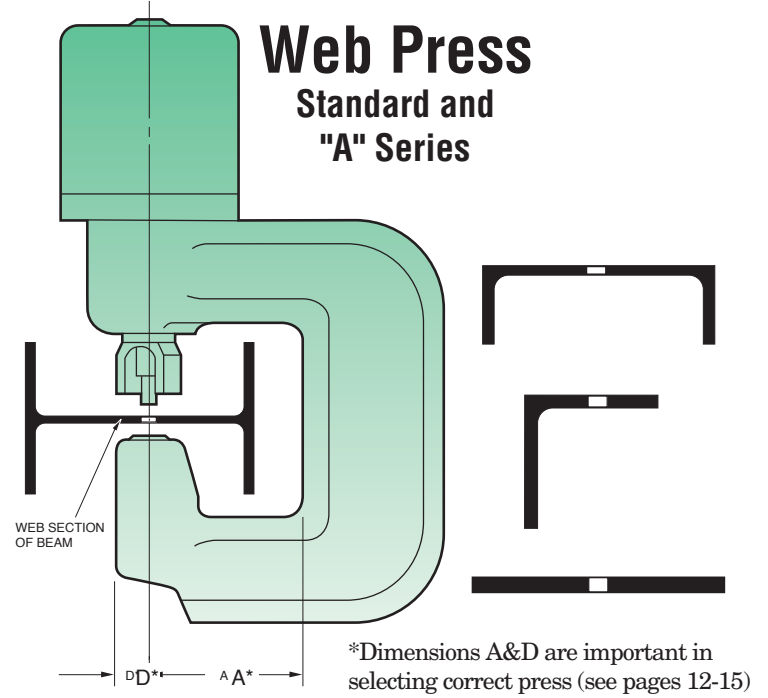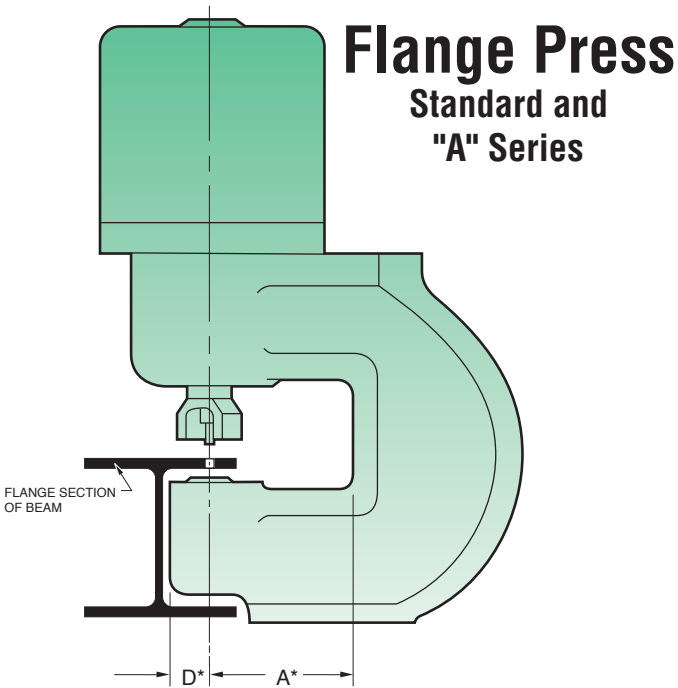


STANDARD SHAPES TYPICALLY PUNCHED WITH PORTABLE PRESSES

Can also punch the flange section but smaller sizes are limited by pedestal height as shown

| DESCRIPTION | TYPICAL DESIGNATION | DESCRIPTION | TYPICAL DESIGNATION |
|--|---|---|---|
| Wide Flange Beam or "W" Beams (Flanges are Straight) | For Example: W 21 x 68 W=Wide Flange 21 =21" Wide 68=68#/LIN.FT. | Ship & Car Channel (Note: Flanges are Straight) | MC 13 x 50 13" Channel Weighing 50#/FT. |
| Angle | For Example: 6" x 6" x 1/2" Both Legs 6" L.G., 1/2" Thick | "I" Beam **(Note: Flanges are Tapered) | S12 x 31.8 12" "I" Beam Weighing 31.8#/ FT. |
| American Standard Channel **(Note: Flanges are Tapered) | C8 x 13.75 8" Channel Weighing 13.75#/FT. | Flat Bar | |



- 1) What are you punching...Angle, Flat Bar, Channel, Beams, Plate, Special Shapes?
Action: Select Flange and/or Web Style Press (see page 5)
- 2) What are the materials and hole sizes/shapes required?... Steel, Copper, Aluminum, etc.
Action: Determine tonnages, use handy chart (page 7) for complete punching information request Technical Paper “Punching & Shearing Science”
- 3) How fast do you want to punch?
How many presses are you going to run?
Action: Select hydraulic power unit; determine proper HP, 1, 2 or 3 valve hookups etc. (see page 16)
- 4) How far from Power Unit do you want to operate presses?
Action: Select proper hose & control wire assembly (see page 16)
- 5) How will the press be mounted or suspended?
Action: Select proper suspension spring (see page 18) or make stationary mountings
- 6) What are tooling requirements...Tooling style, shape, die clearances etc.?
Action: Select proper tool style (see page 19) Use Ironworker and Structural Tooling Catalog



TONNAGE CAPACITY SELECTION...

TONS FORCE REQUIRED TO PUNCH ASTM-A36 STRUCTURAL STEEL (60,000 PSI shear strength) for other materials see chart below for multipliers

| HOLE DIA. (inches) | MATERIAL THICKNESS | | | | | | | | | | | | |
|-----------------------|--------------------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 1/16 | 1/8 | 3/16 | 1/4 | 5/16 | 3/8 | 1/2 | 5/8 | 3/4 | 7/8 | 1 | 1-1/8 | 1-1/4 |
| 1/4 | 1.4 | 3.0 | 4.4 | 5.9 | 7.3 | 8.8 | | | | | | | |
| 5/16 | 1.8 | 3.7 | 5.5 | 7.4 | 9.2 | 11.0 | | | | | | | |
| 3/8 | 2.1 | 4.4 | 6.6 | 8.8 | 11.0 | 13.3 | 17.7 | | | | | | |
| 7/16 | 2.5 | 5.2 | 7.7 | 10.3 | 12.9 | 15.5 | 20.6 | | | | | | |
| 1/2 | 2.8 | 5.9 | 8.8 | 11.8 | 14.7 | 17.7 | 23.6 | 29.5 | | | | | |
| 9/16 | 3.2 | 6.7 | 9.9 | 13.2 | 16.5 | 19.9 | 26.5 | 33.1 | | | | | |
| 5/8 | 3.5 | 7.4 | 11.0 | 14.7 | 18.4 | 22.1 | 29.4 | 37.0 | 44.2 | | | | |
| 11/16 | 3.9 | 8.1 | 12.1 | 16.2 | 20.2 | 24.3 | 32.4 | 40.5 | 48.6 | | | | |
| 3/4 | 4.2 | 8.9 | 13.2 | 17.7 | 22.1 | 26.5 | 35.3 | 44.2 | 53.0 | 62.0 | | | |
| 13/16 | 4.6 | 9.6 | 14.3 | 19.1 | 24.0 | 28.7 | 38.3 | 48.0 | 57.4 | 67.0 | 76.6 | | |
| 7/8 | 4.9 | 10.3 | 15.4 | 20.6 | 25.7 | 31.0 | 41.0 | 51.5 | 62.0 | 72.2 | 82.5 | | |
| 15/16 | 5.3 | 11.1 | 16.5 | 22.1 | 27.6 | 33.1 | 44.2 | 55.2 | 66.3 | 77.3 | 88.3 | 99.4 | |
| 1 | 5.6 | 11.8 | 17.6 | 23.6 | 29.4 | 35.3 | 47.1 | 59.0 | 70.7 | 82.5 | 94.3 | 106.0 | |
| 1-1/16 | 6.0 | 12.5 | 18.7 | 25.0 | 31.3 | 37.6 | 50.0 | 62.6 | 75.0 | 87.7 | 100.0 | 113.0 | 125.2 |
| 1-1/8 | 6.3 | 13.3 | 19.8 | 26.5 | 33.0 | 39.7 | 52.9 | 66.2 | 79.4 | 92.7 | 106.0 | 119.0 | 132.5 |
| 1-3/16 | 6.7 | 14.0 | 20.9 | 28.0 | 34.9 | 42.0 | 55.9 | 69.9 | 83.9 | 97.9 | 111.9 | 125.9 | 139.9 |
| 1-1/4 | 7.1 | 14.7 | 22.0 | 29.5 | 36.8 | 44.2 | 58.9 | 73.7 | 88.4 | 103.2 | 117.9 | 132.6 | 147.3 |
| 1-5/16 | 7.4 | 15.5 | 23.1 | 30.9 | 38.6 | 46.3 | 61.8 | 77.2 | 92.7 | 108.1 | 123.6 | 139.0 | 154.6 |
| 1-3/8 | 7.8 | 16.2 | 24.2 | 32.4 | 40.4 | 48.6 | 64.8 | 81.0 | 97.2 | 113.4 | 129.6 | 145.8 | 162.0 |
| 1-1/2 | 8.5 | 17.7 | 26.4 | 35.3 | 44.1 | 53.0 | 70.6 | 88.3 | 106.0 | 123.6 | 141.3 | 159.0 | 176.7 |
| 1-3/4 | 9.9 | 20.6 | 30.9 | 41.2 | 51.5 | 61.9 | 82.5 | 103.1 | 123.7 | 144.3 | 164.9 | 185.6 | 206.2 |
| 2 | 11.3 | 23.6 | 35.3 | 47.1 | 58.8 | 70.7 | 94.3 | 117.8 | 141.4 | 164.9 | 188.5 | 212.1 | 235.6 |
| 2-1/4 | 12.7 | 26.5 | 39.7 | 53.0 | 66.2 | 79.5 | 106.0 | 132.5 | 159.0 | 185.6 | 212.1 | 238.6 | |
| 2-1/2 | 14.2 | 29.5 | 44.1 | 58.9 | 73.5 | 88.4 | 117.8 | 147.3 | | | | | |
| 2-3/4 | 15.6 | 32.4 | 48.5 | 64.8 | 80.9 | 97.2 | 129.6 | | | | | | |
| 3 | 17.0 | 35.4 | 52.9 | 70.7 | 88.2 | 106.0 | 141.4 | | | | | | |

CHART MULTIPLIER for materials other than A-36 structural steel

| TYPE OF MATERIAL | SHEAR STRENGTH PSI | CHART MULTIPLIER |
|---------------------------------|-----------------------|------------------|
| Aluminum, 1/2 hard sheet | 19,000 | .32 |
| Copper, rolled | 28,000 | .47 |
| Mild Steel - H.R. Plate 1020 | 50,000 | .83 |
| Boiler Plate | 55,000 | .92 |
| Structural Cor-Ten (ASTM -A242) | 66,000 | 1.10 |
| Structural A572-GR50 | 70,000 | 1.17 |
| Steel, 50 Carbon HP Plate | 70,000 | 1.17 |
| Steel, Stainless 302, 304, 316 | 70,000 | 1.17 |
| Structural T-1 | 90,000 | 1.50 |


For punching materials with a different shear strength than 60,000 PSI as listed in the tonnage charts, it is necessary to use a multiplier for calculating the proper amount of force required to punch the hole.

NOTE: To promote good punch life, always check material thickness to punch diameter ratio. Request Technical Paper "Punching & Shearing Science" for recommendations and explanation.

EXAMPLE


To punch a 7/8" diameter hole through 7/8" material, the force required (from the chart) is 72.2 tons. If this material is stainless steel, with a shear strength of 70,000 PSI, the correct multiplier to use is 1.17 — therefore; 72.2 tons x 1.17 = 84.5 tons, actual force required.

PRESS SELECTION...



STANDARD FLANGE PRESSES

- 20 to 90 ton capacities
- Handgrips optional on 30 to 90 ton models

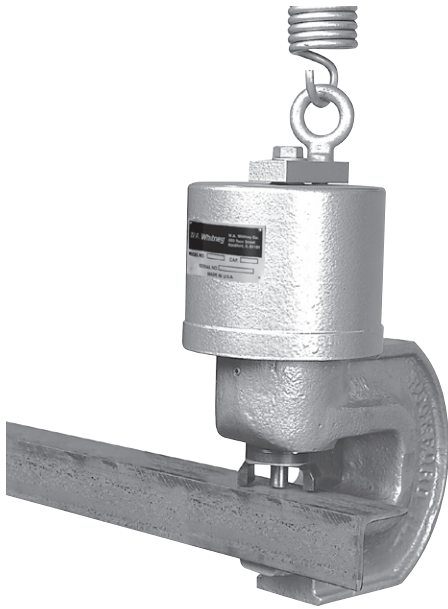

720




720X6



730



730CC



730X8



750




770




790




790AX6



7150AX6




7150AX12



7250AX12

“A” SERIES FLANGE PRESSES

- 90 to 250 ton capacities
- Automatic ram reversal
- Can use keyed punches and dies
- Replaceable die pockets
- Handgrips standard- 90 & 150 ton models only


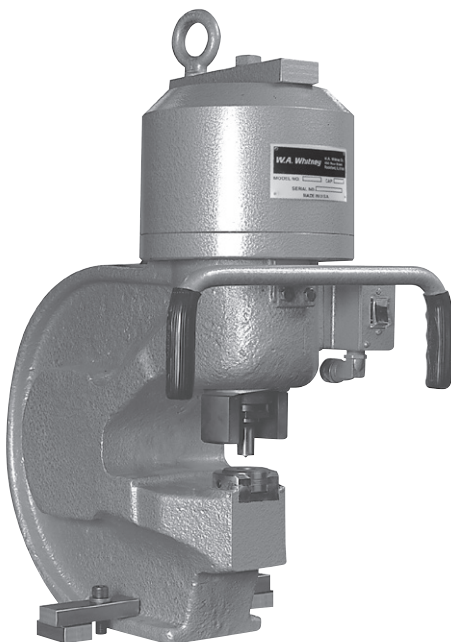


Shows clamps for mounting to bench

| CAPACITY (tons) | MAX. DIA. HOLE* | MAX. MATERIALS THICKNESS* | THROAT DEPTH | STROKE | WEIGHT (lbs.) | PUNCH STYLE | DIE STYLE | RECOMMENDED POWER UNIT | APPROX. PUNCHING CYCLE TIME |
|--------------------|-----------------------|---------------------------------|-----------------|--------|------------------|-------------------|--------------|-----------------------------|--------------------------------------|
| 20 | 13/16 | 9/16 | 2-1/4 | 7/8 | 36 | 720 | 720 | 700-SV-1A or 700-SV-3A | 5.00 3.00 |
| 20 | 13/16 | 9/16 | 6 | 7/8 | 77 | 720 | 720 | 700-SV-1A or 700-SV-3A | 5.00 3.00 |
| 30 | 1-1/2 | 5/8 | 3-1/8 | 7/8 | 70 | 740 | 740 | 700-SV-1A or 700-SV-3A | 7.00 4.00 |
| 30 | 13/16 | 5/8 | 3-1/8 | 7/8 | 70 | 740 | 720 | 700-SV-1A or 700-SV-3A | 7.00 4.00 |
| 30 | 1-1/2 | 5/8 | 8 | 7/8 | 130 | 740 | 740 | 700-SV-1A or 700-SV-3A | 7.00 4.00 |
| 50 | 1-1/2 | 3/4 | 4-1/4 | 1-3/8 | 200 | 740 | 740 | 700-SV-3A or 700-SV-10A | 12.00 5.00 |
| 70 | 1-3/8 | 1 | 4-1/4 | 1-3/8 | 240 | 770 | 740 | 700-SV-10A | 6.00 |
| 90 | 1-1/4 | 1 | 4-1/4 | 1-3/8 | 275 | 770 | 740 | 700-SV-10A or 700-SV-20A | 7.00 4.00 |
| 90 | 1-1/2 | 1-1/8 | 6-1/4 | 1-5/8 | 450 | 770 790XX | 740 790XX | 700-SV-10A or 700-SV-20A | 8.00 5.00 |
| 150 | 2 | 1-3/8 | 6-1/4 | 2 | 1100 | 770/790XX 7501 | 7502 | 700-SV-20A | 9.00 |
| 150 | 3 | 1-3/8 | 12-1/2 | 2 | 2100 | 770/790XX 7501 | 7602 | 700-SV-20A | 9.00 |
| 250 | 2-3/8 | 1-3/8 | 12-1/2 | 2 | 4800 | 7501 | 7602 | 700-SV-20A | 14.00 |

* Hole diameter & material thickness capacities are given independent of each other. Maximum diameter of hole punched in a given thickness of material is dependent on press tonnage capacity and material specifications. See charts on Page 7.

PRESS SELECTION...

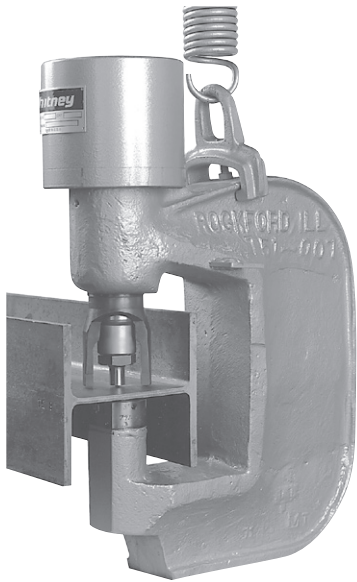


STANDARD WEB PRESSES


- 20 to 90 ton capacities
- Eye brackets adjustable for horizontal or vertical suspension
- Handgrips optional-all models




721




731




751



771




791

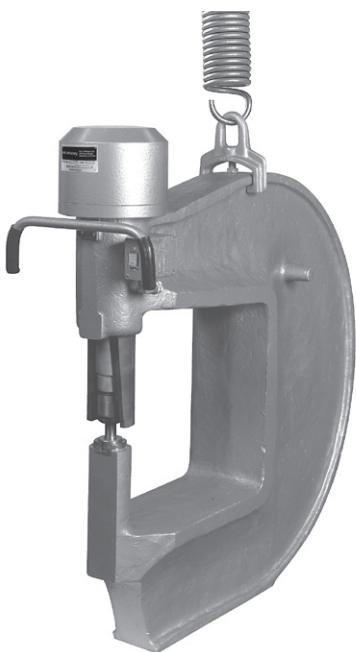


“A” SERIES WEB PRESSES

- 90 to 150 ton capacities
- Can use keyed punches and dies
- Automatic ram reversal
- Replaceable die pocket
- Heavy tonnage capacity
- Hand grips standard on 90-150 ton models
- Eye brackets adjustable for horizontal or vertical suspension



791AX18

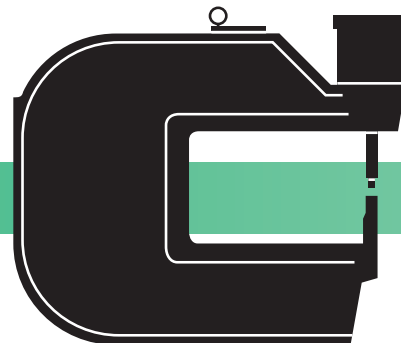

791AX30




7151AX12


| CAPACITY (tons) | MAX. DIA. HOLE* | MAX. MATERIALS THICKNESS* | THROAT DEPTH | STROKE | WEIGHT (lbs.) | PUNCH STYLE | DIE STYLE | RECOMMENDED POWER UNIT | APPROX. PUNCHING CYCLE TIME |
|--------------------|-----------------------|---------------------------------|-----------------|--------|------------------|-------------------|--------------|-----------------------------|--------------------------------------|
| 20 | 13/16 | 9/16 | 2-3/4 | 7/8 | 58 | 720 | 720 | 700-SV-1A or 700-SV-3A | 5.00 3.00 |
| 30 | 13/16 | 9/16 | 4-1/4 | 7/8 | 124 | 740 | 720 | 700-SV-1A or 700-SV-3A | 7.00 4.00 |
| 50 | 1-1/2 | 3/4 | 6-1/4 | 1-3/8 | 300 | 740 | 740 | 700-SV-3A or 700-SV-10A | 12.00 5.00 |
| 70 | 1-1/2 | 1 | 7-3/4 | 1-3/8 | 560 | 770 | 740 | 700-SV-10A | 6.00 |
| 90 | 1-1/2 | 1 | 12-1/2 | 1-3/8 | 1200 | 770 | 740 | 700-SV-10A or 700-SV-20A | 7.00 4.00 |
| 90 | 1-1/2 | 1-1/8 | 18-1/2 | 1-5/8 | 2000 | 770 790XX | 740 790XX | 700-SV-10A or 700-SV-20A | 8.00 5.00 |
| 90 | 1-1/2 | 1-1/8 | 30-1/2 | 1-5/8 | 4500 | 770 790XX | 740 790XX | 700-SV-10A or 700-SV-20A | 8.00 5.00 |
| 150 | 2 | 1-3/8 | 12-1/2 | 2 | 3600 | 770/790XX 7501 | 7502 | 700-SV-20A | 9.00 |

* Hole diameter & material thickness capacities are given independent of each other. Maximum diameter of hole punched in a given thickness of material is dependent on press tonnage capacity and material specifications. See charts on Page 7.

DIMENSIONS — STANDARD FLANGE PRESSES







20 TON THRU 90 TON CAPACITIES...

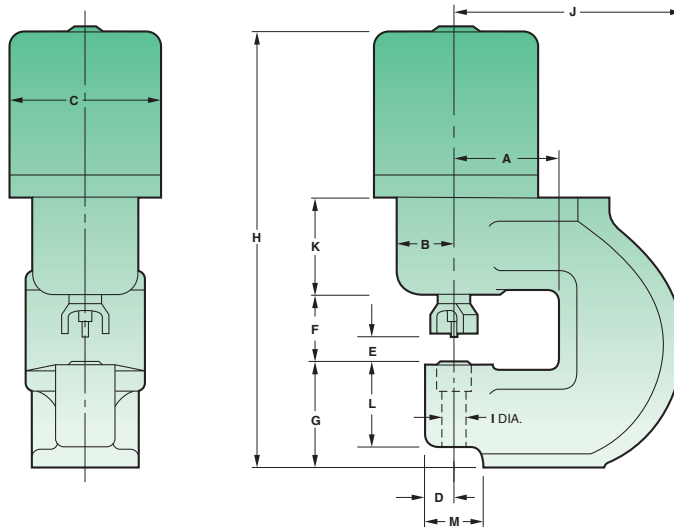

| PRESS MODEL NO. | 720 | 720X6 | 730 | 730CC | 730X8 | 750 | 770 | 790 |
|-----------------|---------|---------|---------|----------|---------|---------|---------|---------|
| CAPACITY TONS | 20 | 20 | 30 | 30 | 30 | 50 | 70 | 90 |
| THROAT DEPTH | 2-1/4 | 6 | 3-1/8 | 3-1/8 | 8 | 4-1/4 | 4-1/4 | 4-1/4 |
| A | | | | | | | | |
| B | 1-5/8 | 1-9/16 | 1-15/16 | 1-15/16 | 2-1/8 | 2-1/16 | 2-11/16 | 3-1/4 |
| C | 4-1/2 | 4-1/2 | 5-1/2 | 5-1/2 | 5-1/2 | 7-1/4 | 8-1/4 | 9-1/2 |
| D | 11/16 | 11/16 | 1-1/8 | 11/16 | 1-1/8 | 1-1/8 | 1-1/8 | 1-1/8 |
| E | 5/8 | 5/8 | 21/32 | 21/32 | 21/32 | 1-3/32 | 1-3/32 | 1-3/32 |
| F | 1-7/16 | 1-7/16 | 1-7/8 | 1-7/8 | 1-7/8 | 2-5/32 | 2-5/32 | 2-1/4 |
| G | 2-1/2 | 3-3/4 | 3-1/4 | 3-1/4 | 5-1/4 | 4-1/4 | 4-3/4 | 5 |
| H | 10-5/8 | 11-7/8 | 11-7/8 | 12-11/16 | 15-3/8 | 16-1/4 | 17-3/4 | 18-5/8 |
| I | 7/8 | 7/8 | 1-5/8 | 7/8 | 1-5/8 | 1-9/16 | 1-7/16 | 1-5/16 |
| J | 5 | 11 | 7-1/4 | 7-1/4 | 13-1/4 | 9-1/4 | 9-3/4 | 10-1/4 |
| K | 2-1/4 | 2-1/4 | 2-3/4 | 2-3/4 | 3-1/2 | 3-1/2 | 4 | 4-1/2 |
| L | 1-7/8 | 2-1/8 | 2-11/16 | 2-11/16 | 3-1/8 | 3-3/16 | 3-7/16 | 3-1/2 |
| M | 1-1/4 | 1-5/8 | 1-7/8 | 1-7/16 | 2-3/16 | 2 | 2 | 2-1/8 |
| R | 3 | 3 | 4 | 4 | 4 | 5 | 5 | 5 |
| PRESS PART NO. | 720-000 | 720-044 | 730-000 | 730-020 | 730-019 | 750-015 | 770-015 | 790-024 |


DIMENSIONAL CAPABILITIES






DIMENSIONS — 'A' SERIES FLANGE PRESSES

90 TON THRU 250 TON CAPACITIES...

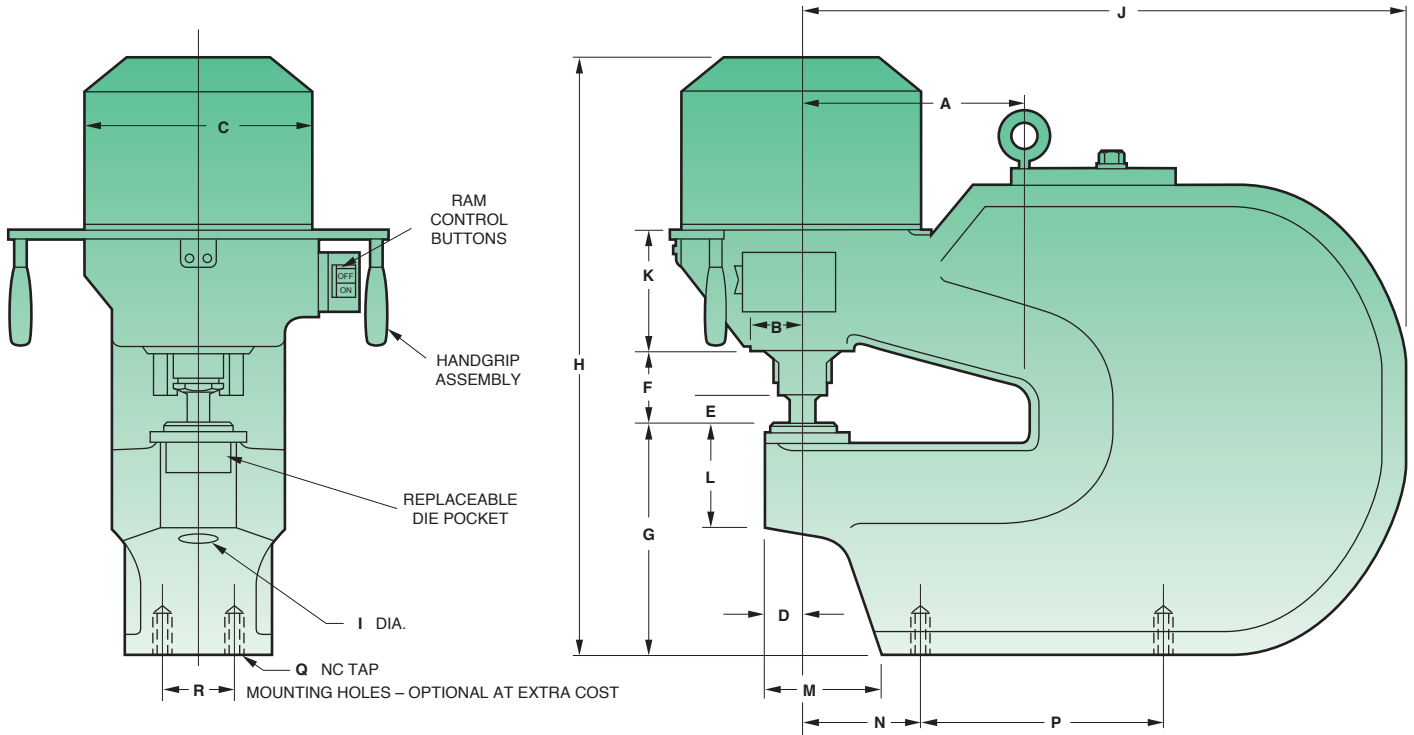


| PRESS MODEL NO. | 790AX6 | 7150AX6 | 7150AX12 | 7250AX12 |
|-------------------|------------------|---------|----------|----------|
| CAPACITY TONS | 90 | 150 | 150 | 250 |
| THROAT DEPTH | 6-1/4 | 6-1/4 | 12-1/2 | 12-1/2 |
| A | 3-1/4 | 3 | 3 | 5-1/2 |
| B | 9-1/2 | 13-1/2 | 13-1/2 | 17 |
| C | 1 | 1-7/16 | 2 | 2-1/16 |
| D | 1-5/16 | 1-5/8 | 1-5/8 | 1-5/8 |
| E | 3-11/16 | 4-1/8 | 4-1/8 | 4-3/16 |
| F | 8 | 10-9/16 | 13 | 16 |
| G | 24-13/16 | 32 | 34-3/8 | 44-1/4 |
| H | 1-9/16 | 2-1/8 | 3-1/8 | 2-5/8 |
| I | 17-1/2 | 23-1/4 | 33-1/2 | 38 |
| J | 5-5/8 | 7 | 7 | 11 |
| K | 4-3/4 | 5-7/8 | 5-7/8 | 9 |
| L | 3-1/4 | 4-1/2 | 6-1/2 | 5-1/2 |
| M | 3-13/16 | 4 | 6 | 7 |
| N | 5 | 12 | 16 | 19 |
| P | 3/4-10 | 7/8-9 | 7/8-9 | 7/8-9 |
| Q | on \varnothing | 4-1/2 | 4-1/2 | 4-1/2 |
| R | | | | |
| NO. OF MTG. HOLES | 2 | 4 | 4 | 4 |
| PRESS PART NO. | 790-084 | 715-028 | 715-029 | 817-333 |


DIMENSIONS — STANDARD WEB PRESSES



20 TON THRU 90 TON CAPACITIES...

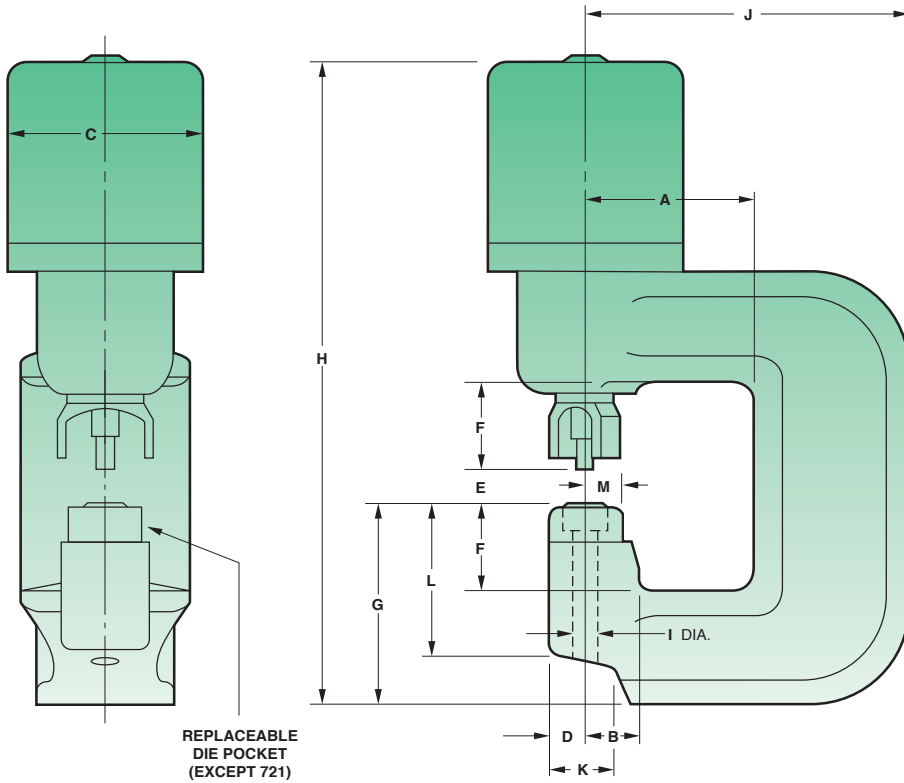


DIMENSIONAL CAPABILITIES

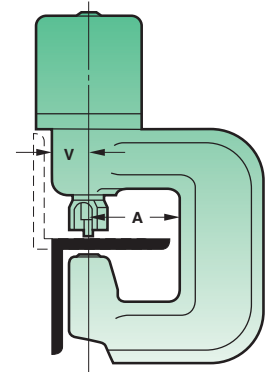


ANGLE IRON/FLAT STOCK


| PRESS MODEL NO. | 721 | 731 | 751 | 771 | 791 |
|-----------------|----------|---------|----------|---------|---------|
| CAPACITY TONS | 20 | 30 | 50 | 70 | 90 |
| THROAT DEPTH | 2-3/4 | 4-1/4 | 6-1/4 | 7-3/4 | 12-1/2 |
| A | 1 | 1 | 1-1/2 | 1-1/2 | 1-1/2 |
| B | 4-1/2 | 5-1/2 | 7-1/4 | 8-1/4 | 9-1/2 |
| C | 11/16 | 11/16 | 1-1/8 | 1-1/8 | 1-1/8 |
| D | 5/8 | 5/8 | 1-3/32 | 1-3/32 | 1-3/32 |
| E | 1-5/8 | 2-5/8 | 4-1/8 | 5-3/8 | 7-3/8 |
| F | 4-1/2 | 6-3/8 | 10 | 12-1/4 | 17-3/4 |
| G | 13-11/16 | 18-3/16 | 26-15/16 | 31-1/4 | 40-1/2 |
| H | 7/8 | 7/8 | 1-9/16 | 1-9/16 | 1-9/16 |
| I | 5-3/4 | 10-5/16 | 15-3/8 | 20-1/4 | 28-3/8 |
| J | 1-3/8 | 1-3/4 | 2-1/2 | 2-7/8 | 2-7/8 |
| K | 3-3/16 | 4-3/8 | 7-3/16 | 8-3/8 | 12 |
| L | 3/4 | 3/4 | 1-3/32 | 1-3/32 | 1-3/32 |
| M | 4 | 5 | 8 | 10 | 15 |
| R | 1 | 1-1/2 | 1-1/2 | 1-1/2 | 1-1/2 |
| S | 5-1/2 | 8-1/2 | 12-1/2 | 15-1/2 | 25 |
| T | 3-1/2 | 5-1/2 | 8-1/2 | 10-3/4 | 15-3/4 |
| U | 1-5/8 | 1-15/16 | 2-3/8 | 2-11/16 | 3-1/8 |
| V | 721-000 | 731-000 | 751-000 | 771-000 | 791-000 |

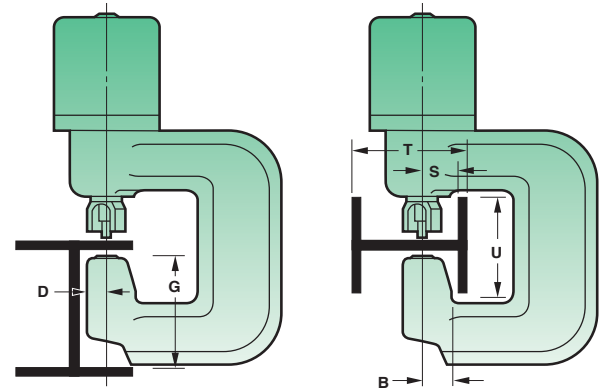

WIDE FLANGE BEAMS

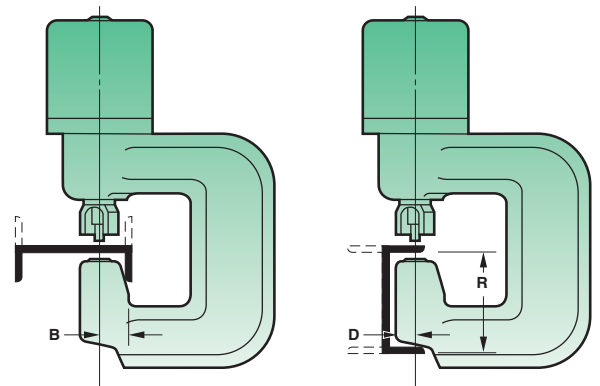


AMERICAN STANDARD "I" BEAMS/CHANNELS




DIMENSIONS — 'A' SERIES WEB PRESSES

90 TON THRU 150 TON CAPACITIES...

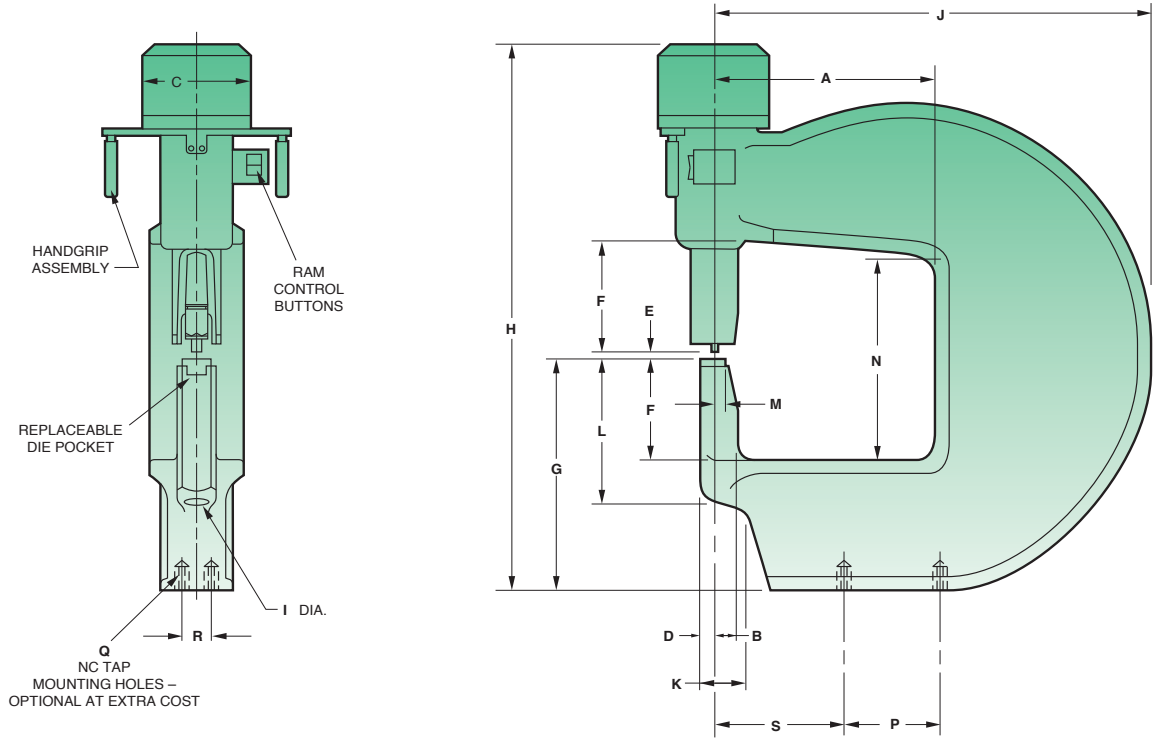

| PRESS MODEL NO. | 791AX18 | 791AX30 | 7151AX12 |
|-------------------|---------|---------|----------|
| CAPACITY TONS | 90 | 90 | 150 |
| THROAT DEPTH | 18-1/2 | 30-1/2 | 12-1/2 |
| A | | | |
| B | 1-1/2 | 1-1/2 | 1-9/16 |
| C | 9-1/2 | 11 | 13-1/2 |
| D | 1-3/32 | 1-3/32 | 1-7/16 |
| E | 1-5/16 | 1-5/16 | 2 |
| F | 8-1/2 | 8-1/2 | 8-1/2 |
| G | 21-1/2 | 26-1/2 | 23-1/4 |
| H | 49-3/8 | 56-5/8 | 57-1/4 |
| I | 1-9/16 | 1-9/16 | 2-1/8 |
| J | 41-1/2 | 60-1/2 | 37-1/2 |
| K | 2-7/8 | 2-7/8 | 3-1/4 |
| L | 13 | 15-1/4 | 17 |
| M | 1-3/32 | 1-3/32 | 1-9/16 |
| N | 18 | 18-1/4 | 17 |
| P | 14 | 6-1/2 | 16 |
| Q | 3/4-10 | 1/2-13 | 7/8-9 |
| R | 2-1/2 | 4 | 4-1/2 |
| NO. OF MTG. HOLES | 4 | 4 | 4 |
| S | 6 | 29-3/4 | 5 |
| PRESS PART NO. | 791-019 | 791-020 | 715-112 |

POWER UNIT SELECTION...



DETERMINING THE CORRECT POWER UNIT

All of the structural presses shown in this catalog operate from a hydraulic Power Unit. These power units have an operating pressure of 5000 psi and are available in four different sizes. The basic difference between these models is the volume of oil each is capable of delivering to the press. This is further determined by the size of the pump motor. As a basic rule of thumb, the more horse power—the faster the press cycle time.

The 1-1/2 HP hydraulic power unit is a two-stage type that delivers maximum flow at low pressures up to 1,000 psi and reduced flow up to 5,000 psi. The 3, 10 and 20 HP hydraulic power units shown in this catalog are all fixed displacement, or single stage, types. Fixed displacement power units are considered to be ideal for single hole punching where it is necessary to jog or inch the punch down for locating to a center punch mark. With this type of power unit, the oil is delivered at a fixed rate regardless of the operating pressure. This means that the ram on the press will travel at the same speed throughout the entire punching cycle. (The return cycle will be slightly faster due to the cylinder displacement differential.)

The size of the power unit required for any given application is determined by how fast you want the unit or units to cycle. The

recommended power unit for each portable press shown in the catalog is listed with the specifications for that press. The cycle time is shown using a full stroke of the press (see pages 8 to 11). When punching thinner material, it is not necessary to use the full stroke of the press, therefore, the cycle time will be faster.

More than one structural press, or another piece of hydraulic equipment such as a shear, can be operated from one 3, 10 or 20 HP hydraulic power unit by adding optional control valves. To determine the proper power unit to use, refer to the chart below. On these pages (16 & 17), each power unit is listed along with the various types of controls which are available for operating one, two, or more presses from the same common power unit.

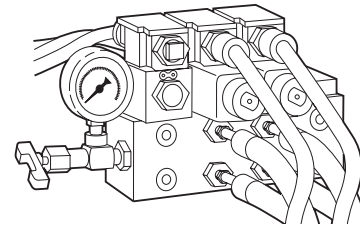


Illustration shows two valve hook-up for operating two presses from a single 3, 10 or 20 HP power unit. Up to three valves can be added.

CYCLE TIME CHART

| PUNCH UNIT | | APPROX. CYCLE TIME (in seconds) | | | |
|-----------------|--------|---------------------------------|-----------|------------|------------|
| PRESS MODEL NO. | STROKE | POWER UNIT | | | |
| | | 700-SV-1A | 700-SV-3A | 700-SV-10A | 700-SV-20A |
| 720 | 7/8 | 5.0 | 3.0 | 2.0 | 1.4 |
| 720X6 | 7/8 | 5.0 | 3.0 | 2.0 | 1.4 |
| 730 | 7/8 | 7.0 | 4.0 | 2.0 | 1.6 |
| 730CC | 7/8 | 7.0 | 4.0 | 2.0 | 1.6 |
| 730X8 | 7/8 | 7.0 | 4.0 | 2.0 | 1.6 |
| 750 | 1-3/8 | 15.0* | 12.0 | 5.0 | 3.0 |
| 770 | 1-3/8 | — | 16.0* | 6.0 | 3.7 |
| 790 | 1-3/8 | — | 19.0* | 7.0 | 4.0 |
| 790AX6 | 1-5/8 | — | — | 8.0 | 5.0 |
| 7150AX6 | 2 | — | — | 16.0* | 9.0 |
| 7150AX12 | 2 | — | — | 16.0* | 9.0 |
| 7250AX12 | 2 | — | — | 25.0* | 14.0 |
| 721 | 7/8 | 5.0 | 3.0 | 2.0 | 1.4 |
| 731 | 7/8 | 7.0 | 4.0 | 2.0 | 1.6 |
| 751 | 1-3/8 | 15.0* | 12.0 | 5.0 | 3.0 |
| 771 | 1-3/8 | — | 16.0* | 6.0 | 3.7 |
| 791 | 1-3/8 | — | 19.0* | 7.0 | 4.0 |
| 791AX18 | 1-5/8 | — | — | 8.0 | 5.0 |
| 791AX30 | 1-5/8 | — | — | 8.0 | 5.0 |
| 7151AX12 | 2 | — | — | 16.0* | 9.0 |

* Cycle time may be slow for some applications
For gang punch application consult factory

The cycle times listed in the chart are for a single press operating off a standard power unit with a 60 hertz electric motor. All cycle times are based upon using presses, hoses and power units as described in this catalog. If 50 hertz operation is used cycle times will be slower.

Cycle times will be slower on 2 and 3 valve (2v & 3v) power units if more than one press is operated at the same time. Operators have independent control of the presses, but may have delays in punch movement as the oil is shared between presses.

PRESSURE SWITCH CYCLE CONTROL (OPTIONAL) STANDARD PRESSES

A pressure switch cycle control is available for the 3, 10, & 20 HP Power Units. The control allows a semi-automatic cycle. Standard operation is normally a jog-only control. Using a pressure switch cycle control will reverse the ram when proper preset pressure is sensed. Consult Piranha to discuss application.


“A” SERIES PRESSES

“A” Series Presses do not require a pressure switch cycle control. “A” Series Presses have a built in limit switch to reverse the ram at the bottom of the press stroke.

HOSE AND CONTROL WIRE ASSEMBLIES

Available Lengths

- ...for 700-SV-1A Power Unit — 12' & 20'
 - ...700-SV-3A Power Unit — 12', 20' & 40'
 - ...700-SV-10A Power Unit — 12', 20' & 40'
 - ...700-SV-20A-1V, 2V & 3V — 12', 20' & 40'
- Hoses and control wires are wrapped as a unit.



POWER UNIT SELECTION...

HYDRAULIC POWER UNITS


Piranha utilizes the proven efficiency of hydraulics to actuate its fabricating equipment.

Portable Press power units are available in 1-1/2, 3, 10 and 20 horsepower models. Power Unit selection depends on the customer requirement with regard to capacity and cycle time needed for the specific operation.



Model 700-SV-1A Power Unit

This power unit offers 1-1/2 horsepower for operation of presses requiring greater portability than afforded with some of the larger model power units. It weighs only 65 pounds and operates at 5000 psi on 115 volt, 60 hz single phase.

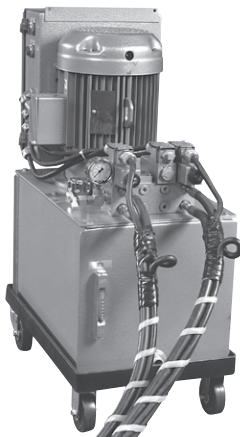

Model 700-SV-3A, 700-SV-10A and 700-SV-20A Power Units

These power units use a pump, reservoir and valving assembly sized for either 3, 10 or 20 horsepower electric motors. This line of power units is available in single (1V), double (2V), and three valve (3V) models and operate also at 5000 psi.


Your Piranha sales engineer will be happy to assist you in the proper selection of a power unit and hydraulic components.

| | 700-SV-1A | 700-SV-3A | 700-SV-10A | 700-SV-20A |
|----------------------------------|-----------------------------------|---|--|---|
| HORSEPOWER | 1-1/2 HP | 3 HP | 10 HP | 20 HP |
| OPERATING PRESSURE | 5000 PSI | 5000 PSI | 5000 PSI | 5000 PSI |
| PUMP OUTPUT @ "0" PSI | 400 CU. IN./ MIN. | 1.5 GPM | 4.6 GPM | 8.3 GPM |
| 5000 PSI | 70 CU. IN./ MIN | 1.4 GPM | 4.1 GPM | 7.5 GPM |
| RESERVOIR CAPACITY IN GALLONS | 1 | 14 | 14 | 30 |
| HYDRAULIC OIL | ISO GRADE 32 AW | ISO GRADE 32 AW 155 SSU @ 100° F | ISO GRADE 32 AW 155 SSU @ 100° F | ISO GRADE 32 AW 155 SSU @ 100° F |
| OIL FILTER | | CARTRIDGE TYPE | CARTRIDGE TYPE | CARTRIDGE TYPE |
| MOTOR | 115 VOLT 60 HZ SINGLE PHASE | 230/460 VOLT 60 HZ 3 PHASE T.E.F.C. | 230/460 VOLT 60 HZ 3 PHASE* T.E.F.C. | 230/460 VOLT 60 HZ 3 PHASE T.E.F.C. |
| HOSE SIZE | 1/4" I.D. 1/4" NPT | 1/4" I.D. 1/4" NPT | 3/8" I.D. 1/4" NPT | 3/8" I.D. 1/4" NPT |
| DIMENSIONS-WIDTH DEPTH-HEIGHT | 12-1/2" X 8" X 19" OVER HANDLE | 29-3/8" X 16" X 33-7/8" | 29-3/8" X 16" X 33-7/8" | 29-3/8" X 16" X 46" |
| WEIGHT (with oil) | 65 lbs. | 358 lbs. | 414 lbs. | 670 lbs. |
| CASTERS | NO | OPTIONAL | OPTIONAL | OPTIONAL |

Ambient temperature range is 50 to 105°F. For other operation consult factory for specific applications.

*230 volt single phase also available

PORTABLE PRESS INSTALLATION METHODS...




SPRINGS



Suspension springs


Suspension springs allow the operator to easily and quickly “float” the press when locating the hole to be punched. These springs are available in different sizes. The spring capacity is determined by the weight of the press to be suspended. A spring may be fastened to an overhead crane, or other movable support, to obtain greater portability of the press.

| PRESS MODEL NO. | Spring Capacity (Min. & Max. lbs) | L Free Length (in.) | M Length (in.) at Max. Load (approx.) | Spring Rate lb./in. | D Outside Dia (in.) | SPRING NO. |
|---|-----------------------------------|---------------------|---------------------------------------|---------------------|--------------------------|------------|
| 721 730 730CC 730X8 731 750 770 | 0-240 | 17 | 28 | 20 | 2-1/2 | 700-377 |
| 751 790 790AX6 | 75-450 | 24 | 39 | 50 | 3 | 700-353 |
| 771 791 | 275-1200 | 36 | 55 | 50 | 3-1/2 | 700-352 |
| 791AX18 7150AX6 7150AX12 | 550-2400 | 41 | 60 | 100 | Two Springs 3-1/2 ea. | 806-134 |
| 791AX30 7151AX12 | 3000-5000 | 45-1/4 | 53-1/4 | 250 | 9-1/2 | 791-040 |

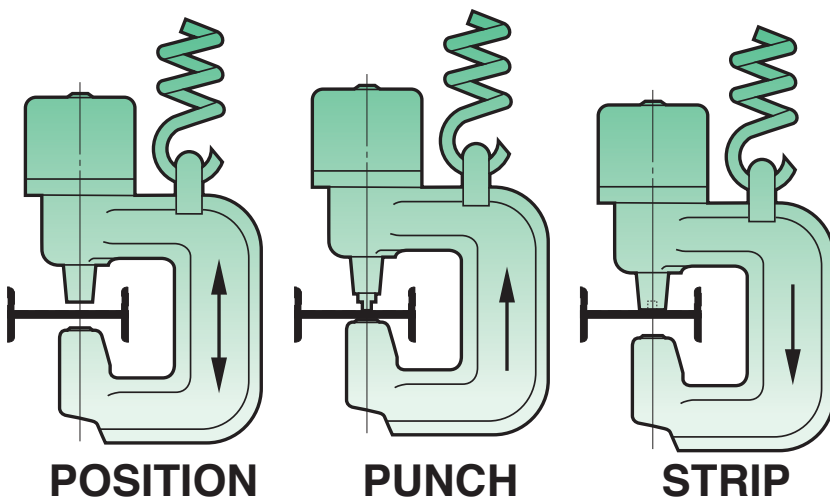


Note the vertical movement of the press relative to the material at a fixed position during the punching cycle.

Note: Always keep press supported when setting on floor to prevent tip-over hazard. Lay press on side when not in use.

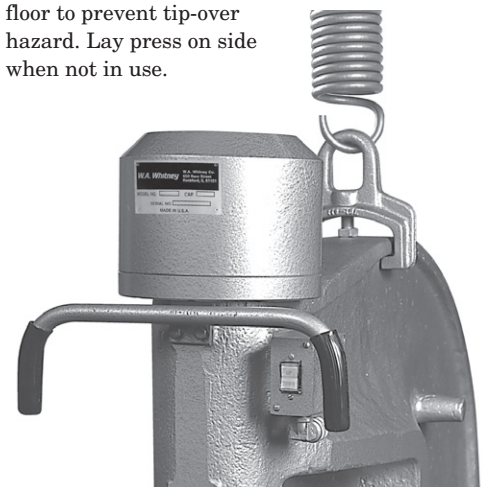


Optional handlebars are available on many models, for convenience in positioning presses.




TOOLING SETUPS...

STANDARD PRESSES

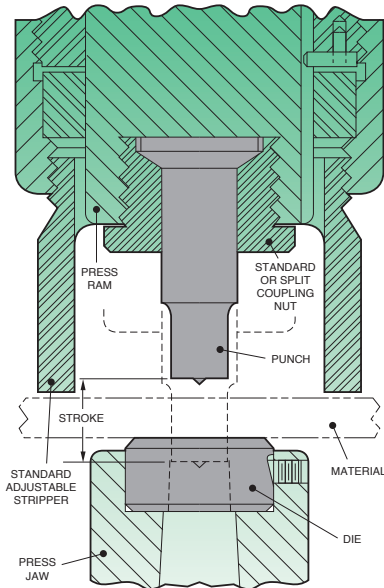


'A' SERIES PRESSES

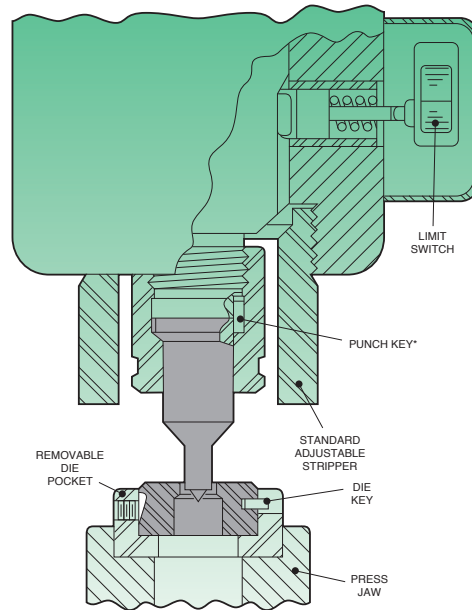

"A" SERIES PRESSES ARE KEYED FOR USING SHAPED TOOLS

OPTIONAL SEE THROUGH GUARD

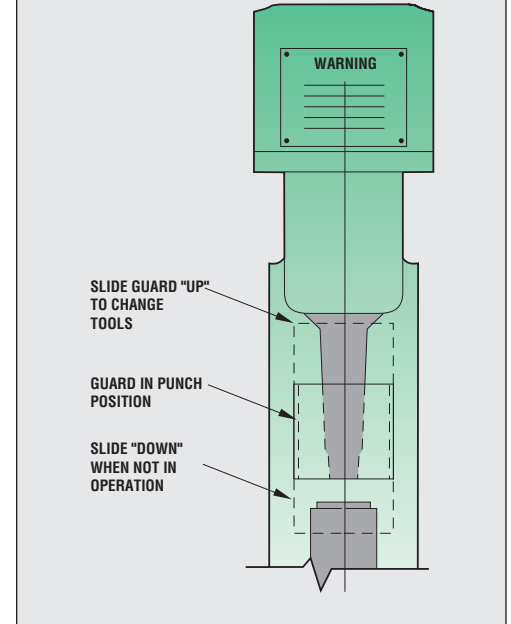


TOOLING FOR PORTABLE PRESSES... (No guards shown)

FOR COMPLETE PUNCH AND DIE SELECTION - REQUEST IRONWORKER & STRUCTURAL TOOLING CATALOG


| PRESS MODEL NO. | USE WITH PUNCH STYLE | USE WITH DIE STYLE | PUNCH & DIE SIZE (In 1/32" Increments) | | | | | | | |
|------------------------------|----------------------|----------------------|--|-------|--------|---------|---------------|-------|---------------|-------|
| | | | ROUND | | SQUARE | | OBROUND | | RECTANGLE | |
| | | | FROM | THRU | FROM | THRU | 1/8 MIN. FROM | THRU | 1/8 MIN. FROM | THRU |
| 720 720X6 721 | 720 | 720 | 1/8 | 13/16 | 3/16 | 9/16 | 3/16 | 13/16 | 3/16 | 13/16 |
| 730CC 731 | 740 | 720 | 7/32 | 13/16 | 3/16 | 9/16 | 3/16 | 13/16 | 3/16 | 13/16 |
| 730 730X8 750 751 | 740 | 740 | 7/32 | 1-1/2 | 1/4 | 1 | 1/4 | 1-1/2 | 1/4 | 1-1/2 |
| 770 771 790 791 | 770 | 740 | 7/32 | 1-1/2 | 1/4 | 1 | 1/4 | 1-1/2 | 1/4 | 1-1/2 |
| 790AX6 791AX18 791AX30 | *770 or *790XX | *740 or *790XX | 7/32 | 1-1/2 | 1/4 | 1 | 1/4 | 1-1/2 | 1/4 | 1-1/2 |
| 7150AX6 7151AX12 | *770/*790XX 7501 | 7502 | 7/32 | 2 | 1/4 | 1-13/32 | 1/4 | 2 | 1/4 | 2 |
| 7150AX12 | *770/*790XX 7501 | 7602 | 7/32 | 3 | 1/4 | 2-1/16 | 1/4 | 3 | 1/4 | 3 |
| 7250AX12 | 7501 | 7602 | 7/32 | 2-3/8 | 1/4 | 1-5/8 | 1/4 | 2-3/8 | 1/4 | 2-3/8 |

* 770 Style punches - limited to 100 ton applications, round holes only, for 1.5" diameter holes and smaller.
 790xx Style punches - limited to 100 ton applications, *for shaped hole applications, for 1.5" diameter holes and smaller.
 7501 Style punches - for over 100 applications, round or *shaped holes, and for holes over 1.5" diameter.
 * **Reminder that any shaped tooling will require a keyed Press and keyed tooling.**

TOOLING SETUPS...



OPTIONAL STRIPPER PLATE

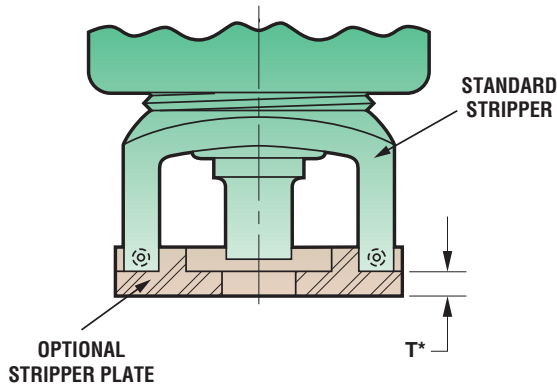


If a hole to be punched is near the edge of the part and both legs of the standard adjustable stripper cannot contact the material, it is necessary to use a stripper plate. This stripper plate should also be used for thin materials that could become deformed by the stripping force. It can be easily attached to the bottom of a standard stripper with set screws.

| PRESS MODEL NO. | USE WITH STRIPPER PLATE | T* (Thickness of Stripper Plate) |
|-------------------------------|-------------------------|----------------------------------|
| 720 720X6 | 721-004 | 1/4 |
| 730 730CC 730X8 | 731-010 | 1/4 |
| 750 770 | 751-013 | 1/4 |
| 790 | 791-008 | 5/16 |
| 790AX6 7150AX6 7150AX12 | - 825-242 | - 5/16 |
| 7250AX12 | | |
| 721 | 721-004 | 1/4 |
| 731 | 731-010 | 1/4 |
| 751 | 751-013 | 1/4 |
| 771 | 751-013 | 1/4 |
| 791 | 791-008 | 5/16 |
| 791AX18 791AX30 | - | - |
| 7151AX12 | - | - |

* Caution: The use of a stripper plate will reduce the thickness of the material that can be punched by the amount "T" as shown in the chart. For further application information, please contact Piranha.


Die Clearance (ASTM-A36 Structural Steel)

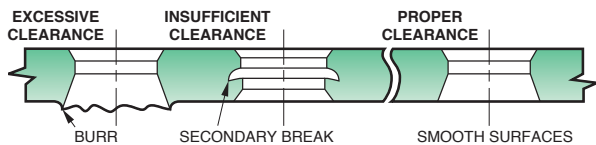

Be sure to allow for proper die clearance. The standard clearance of the die styles used with our presses and die diameter should be approximately 15% of the material thickness. Consult factory for recommended die clearances for other materials.


| MATERIAL THICKNESS (in.) | DIE CLEARANCE (in.) |
|--------------------------|--------------------------|
| 1/8 thru 1/4 | .020 over nominal (.020) |
| 1/4 thru 1/2 | 1/32 over nominal (.051) |
| 7/16 thru 13/16 | 1/16 over nominal (.082) |
| 5/8 thru 1-1/16 | 3/32 over nominal (.111) |
| 1 thru 1-1/4 | 1/8 over nominal (.145) |

Bevel Serrated Dies Required for Punching Tapered Flanges




These dies should be used when punching is required on a tapered surface, such as flanges of I Beams ("S" shapes) or American Standard channels ("C" shapes). (9° bevel angle)

Pin Location (790XX, 7502, 7602 keyed dies)







When ordering shaped dies, specify LR (left to right) or FB (front to back) placement. If not specified, LR location will be shipped.



RIVETING WITH PORTABLE PRESSES


Portable hydraulic flange and web presses can be used for placing rivets. No special adapters or strippers are necessary when using standard rivet punches and dies. A modified cone head rivet, which is produced with this tooling, offers several advantages. The rivet centers itself in the punch and die producing a neat appearing concentric head. The modified cone head rivet requires less force than other rivet styles and does not buckle or bulge the sheet or plate being riveted.

Standard mild steel round head rivets are used to produce the modified cone head rivet. The required length, measured from under the head, can be determined by adding the material thickness (grip) to 1.5 times the rivet diameter. Since the stroke on portable presses is quite short, be sure that the overall length of the rivet (including head) does not exceed the "A" opening.

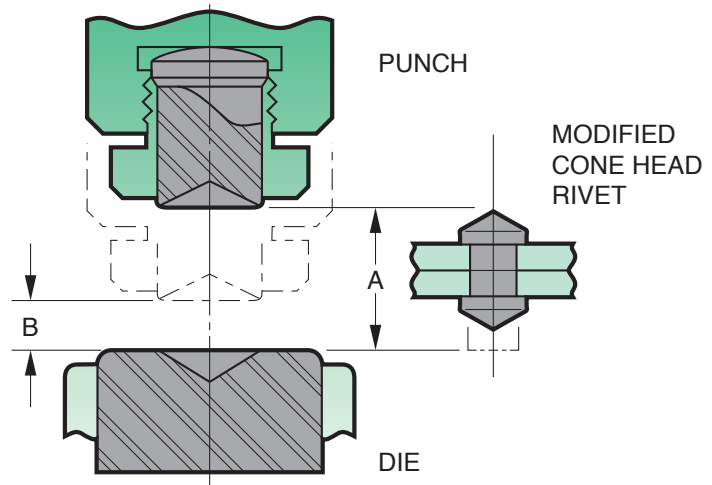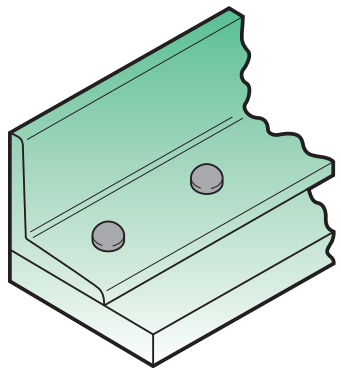



| PRESS MODEL NO. | STANDARD PRESSES | | | | | |
|-----------------|------------------|-----------------|---------------|-----------------|--------------------|--------------|
| | STROKE | PUNCH STYLE NO. | DIE STYLE NO. | MAX. RIVET DIA. | 'A' MAX O.A LENGTH | 'B' MIN GRIP |
| 720 | 7/8 | 720RMC | 720RMC | 3/8 | 1 | 1/8 |
| 730 | 7/8 | 740RMC | 740RMC | 1/2 | 1-1/8 | 1/4 |
| 730CC 731 | 7/8 | 740RMC | 720RMC | 1/2 | 1-1/8 | 1/4 |
| 750 751 | 1-3/8 | 740RMC | 740RMC | 5/8 | 1-5/8 | 1/4 |
| 770 771 | 1-3/8 | 770RMC | 740RMC | 3/4 | 1-3/4 | 3/8 |
| 790 791 | 1-3/8 | 770RMC | 740RMC | 7/8 | 1-3/4 | 3/8 |

Order Genuine Piranha Tooling Today! • 1-800-435-2823



Tooling For Portable Presses And All Major Ironworker Brands

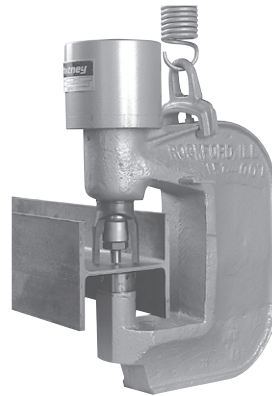

**Punches & Dies for
Piranha Portable Presses,
Anglematics, Beamlines & All
Major Ironworker Brands**

Buffalo™ • Bully™ • Clausing™ • Cleveland Steel Tool™ • Edwards™

Controlled Automation™ • Davco™ • Ficep™ • Franklin™ • Gairu™ • Geka™ • Hawthorne™


Hendley & Whittemore™ • Hill-ACME™ • HMI™ • Ironcrafter™ • Kingsland™

Kling™ • Metal Muncher™ • Mubea™ • Omera™ • Omes™ • Peddinghaus™



Piranha™ • Promoco™ • Scotchman™ • Spartan™ • Uni-Hydro™ • W.A. Whitney™

For Online Ordering of Punches & Dies visit: www.ironworkertooling.com

Piranha & W.A. Whitney are Trademarks of MegaFab. All other marks belong to their respective owners. Piranha, W.A. Whitney and MegaFab are not related to and have no association or sponsorship relationship with the other companies listed above.



PORTABLE PRESS POWER

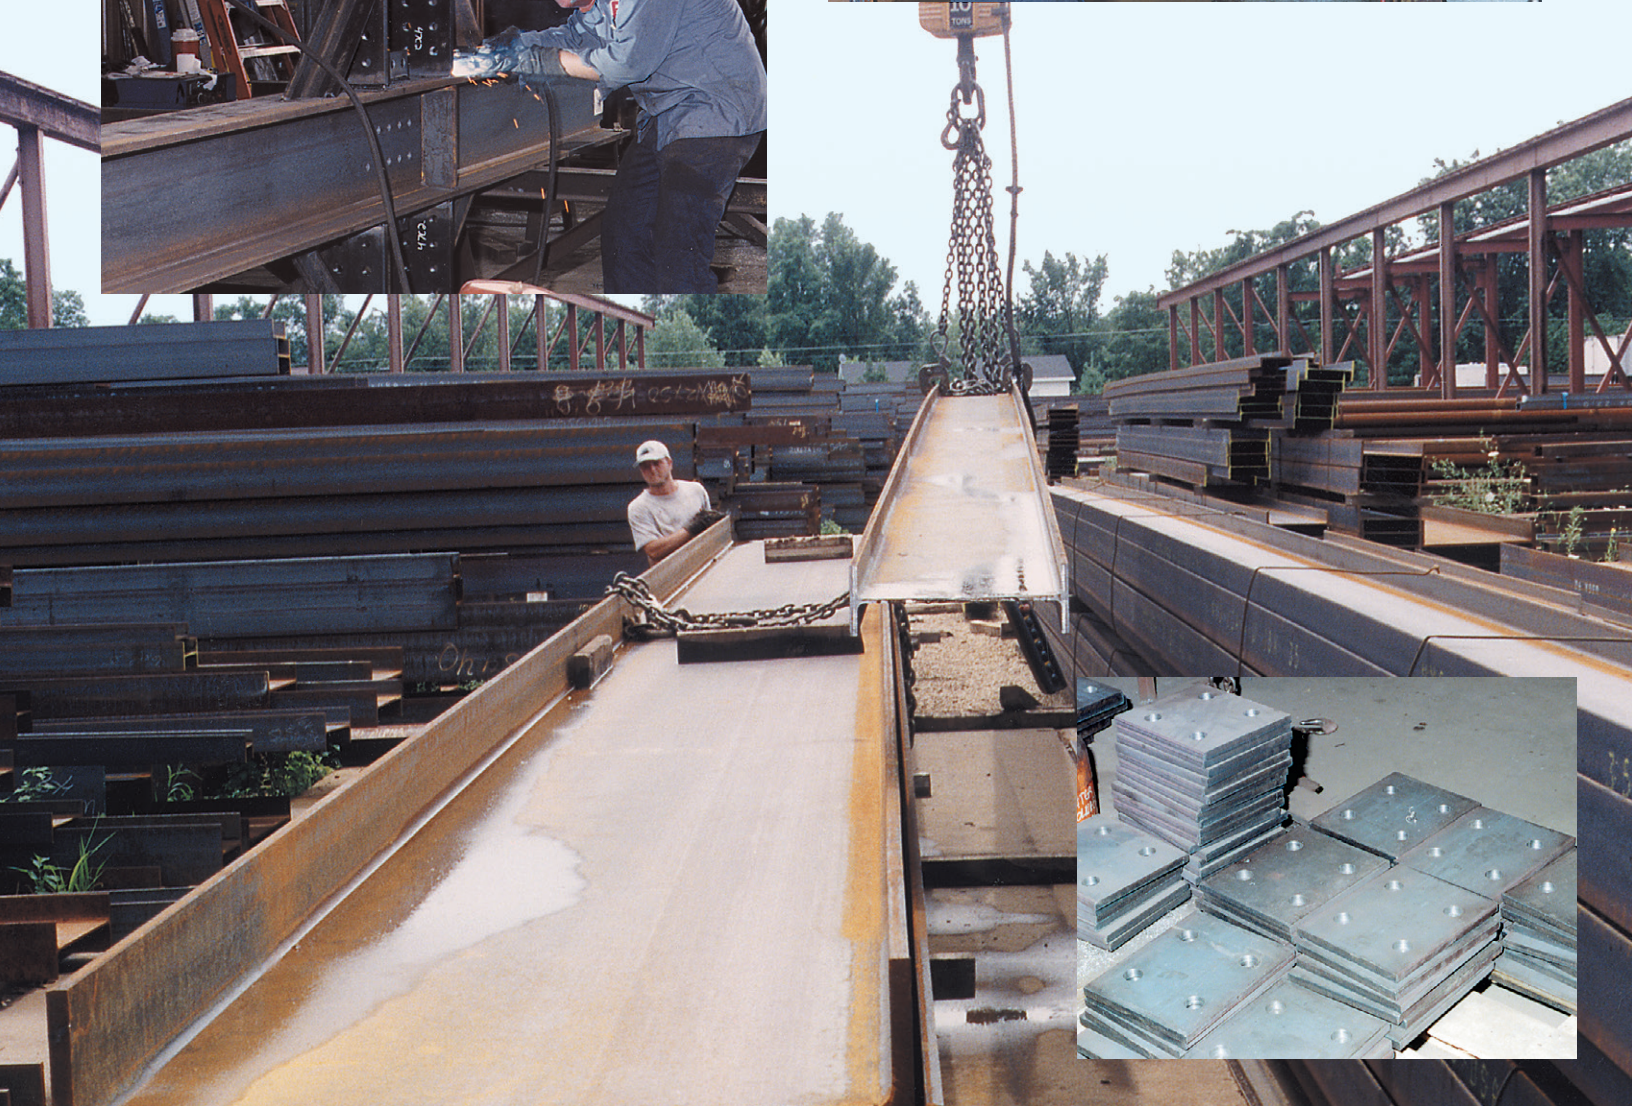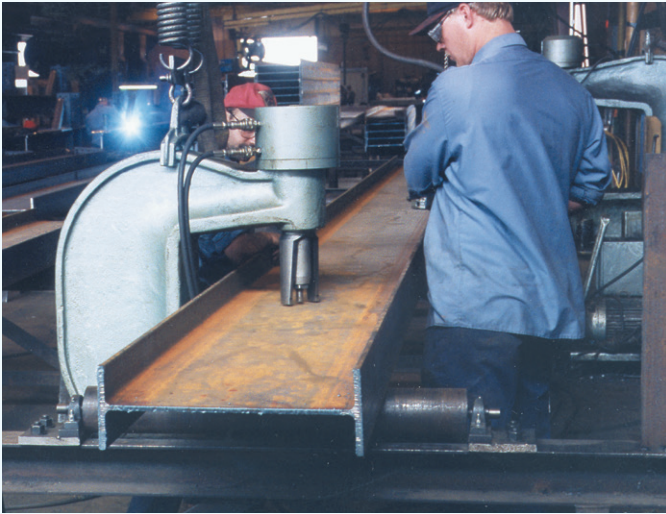



Piranha
650 Race Street
Rockford, IL 61101, USA
800•338•5471
piranhafab.com

USA MANUFACTURER



SINCE 1879