


Mill/Drill – VMD-30VS

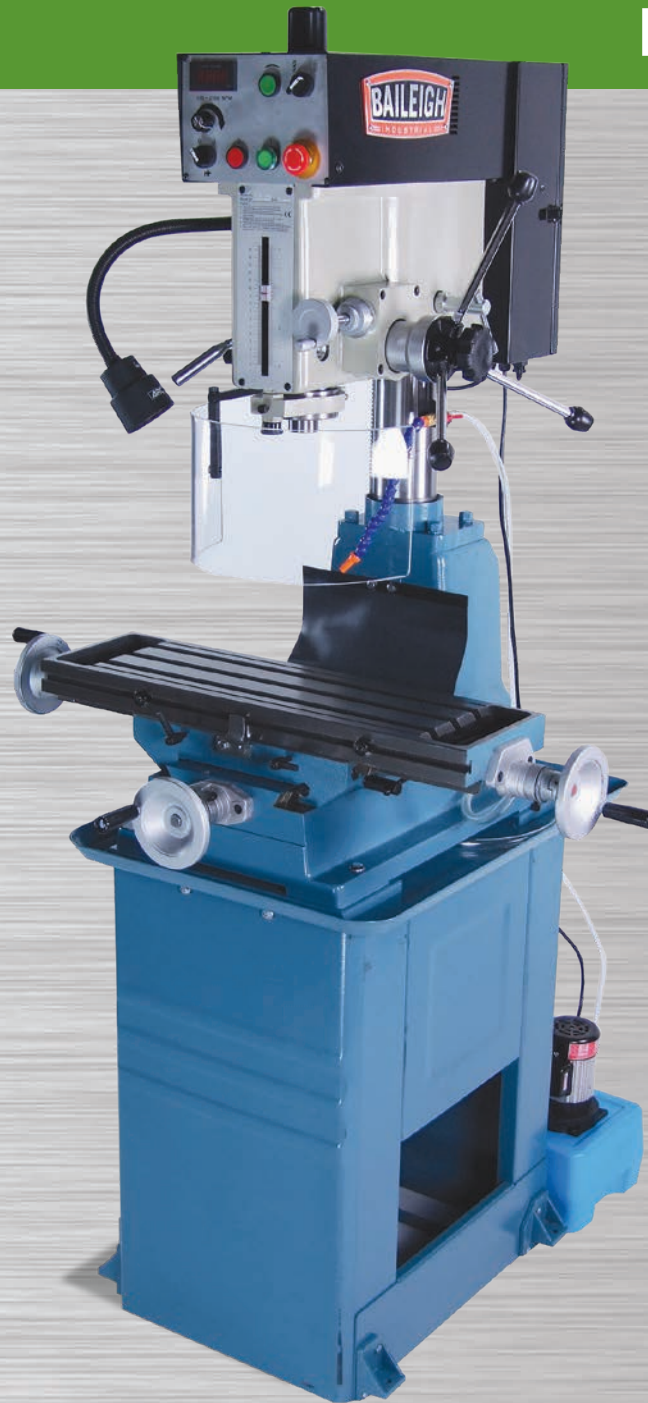

SPECIFICATIONS – VMD-30VS

Drilling Capacity	1.125"	30 mm
Tapping Capacity	.625"	16 mm
Face Milling Capacity	3"	76 mm
Spindle Taper	R8	
Spindle Travel	5.9"	150 mm
Spindle Nose to Table	19.7"	500 mm
X-Axis Travel	14.5"	368 mm
Y-Axis Travel	6.67"	170 mm
Table Size	8.25" X 28.75"	210 mm x 730 mm
Table Capacity	440 lbs.	200 kgs.
T-Slots	.625"	16 mm
Spindle Speeds	150 – 2500 rpm	
Motor	2 hp	
Coolant Motor	1/8 hp	
Shipping Dimensions (L x W x H)	60" x 44" x 68"	1524 x 1120 x 1728 mm
Shipping Weight	616 lbs.	280 kgs.

Specifications subject to change without notice.

- ◆ Variable speed inverter driven head
- ◆ Manual feed
- ◆ R8 spindle taper
- ◆ Digital RPM readout
- ◆ Integrated coolant system
- ◆ Swing away safety shield
- ◆ Halogen work light
- ◆ 7/16" x 20" draw bar
- ◆ 220V 1-phase