


# Mill/Drill – VMD-931G

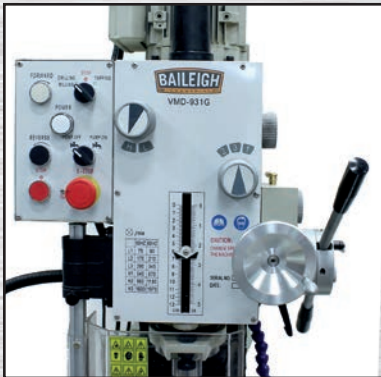

## SPECIFICATIONS – VMD-931G

Drilling Cap. Cast Iron	1.75"	45 mm
Drilling Cap. Mild Steel	1.25"	32 mm
Face Mill Cap.	3.15"	80 mm
End Mill Cap.	1.25"	32 mm
Working Table Size	9.45" x 31.5"	240 x 800 mm
Working Table Cross Travel	7.48"	190 mm
Working Table Longitudinal Travel	22"	560 mm
Maximum Distance Spindle To Base 1	7.32"	440 mm
Spindle Stroke	4.75"	120 mm
T-Slot Size	.55"	14 mm
Head Tilt Left Right	90°	
Spindle Taper	R8	
Draw Bar	7/16"-20 UNF	
Spindle Speed	90, 210, 345, 670, 1180, 1970 rpm	
Power Supply	115V, 60 hz, 20A	
Main Motor	2 hp	
Coolant Pump	1/16 hp	
Shipping Dimension (L x W x H)	69" x 44" x 70"	1753 x 1118 x 1778mm
Gross Weight	710 lbs.	322 kgs.

*Specifications subject to change without notice.*

- ◆ 9" x 31" table
- ◆ Gear driven head
- ◆ R8 spindle taper
- ◆ Power X axis
- ◆ Integrated coolant system
- ◆ Storage cabinet
- ◆ 7/16" x 20" drawbar
- ◆ 110V